




## PTFE Grease 400 ml (G007)

This is another high performing grease from the Ambro-Sol lubricant line. It's smooth to the touch and it resists at high temperature (until 120°C). It is commonly used in iron / steel industry, ceramic, glass and brick industry.

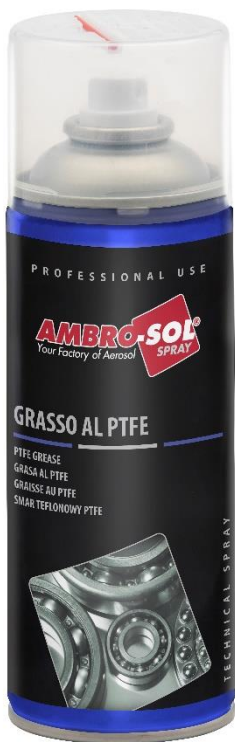

Quantity	400 ml
Barcode	EAN 13: 8034108890067
Box / Case	12 pz

**PTFE GREASE** – Composed of special high-boiling temperature fluids. It doesn't leave residue and performs at high temperatures (up to 120°C/248°F). Low friction coefficient, high chemical inertia, excellent resistance to high loads, it is commonly used on bearings, bushes, conveyor rollers in the steel industries, glass, ceramic and brick industries.

### Technical Specifications:

Aspect	Tin-Plate can containing under pressure fluid
Color	Light Brown
Odour	Characteristic of solvent
Relative density	At 20°C 0,66 ÷ 0,70 g/ml
Flash point	Und.0° C extremely flammable
Pressure at 20°C	4/6 bar
Consistency	NLGI EP2
Penetration at 25°C	265 - 295 (mm x 0,1)
Drip point	> 180°C
Application temperature	-30°C - + 120°C
Main feature	Sliding

**HOW TO USE:** shake and spray directly on the surface from a distance of 15-25 cm. The product could be also be used with a straw that is attached to the cap.

### MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

**BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT**