




Oily dielectric deoxidizer (M201)

This spray is perfect to protect electric parts and electric contacts, and it's ideal for both professional and do-it-yourself uses. It prevents oxidation, it removes residuals, impurities, and it has a degreasing power. Find out all the potential of this product!

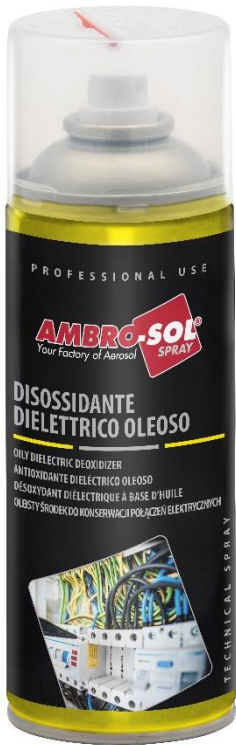

HOW TO USE: Shake Well. Spray directly on the surface to be treated from a distance of about 20 cm. Do not apply to equipment in tension. Do not apply to overheated materials. Turn on power only after the complete evaporation of the product. Allow time to dry.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

Quantity	400 ml
Barcode	EAN 13: 8034108892399
Box / Case	12 pz

OILY DIELECTRIC DEOXIDIZER – Industry specific product that leaves an oily coat which protects the electrical equipment and electrical contacts from oxidation. It prevents and eliminates the formation of residue and impurities that prevent the proper functioning. It has an excellent degreasing power, it promotes conductivity, and it is water repellent. Do not use on live equipment.

Technical Specifications:

Aspect	Tin-Plate Can containing under pressure fluid
Color	Light brown
Odour	Characteristic of solvent
Relative density	at 20°C 0,68 ÷ 0,72 g/ml
Flash point	Und. 0° C extremely flammable
Pressure at 20°C	4/6 bar
Viscosity at 50°C	11 ÷ 24 cst (of the active ingredient)
Solubility	Insoluble in water
Auto-ignition temperature	> 400 ° C (of the active ingredient)
Corrosion on copper	(ASTM D 130): 1 (active ingredient)

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT