

Ceramic Effect Enamel 400 ml (V400POR)

CERAMIC EFFECT ENAMEL: it's a special paint to restore the original shine to aged sanitary ware (sinks, bathtubs, showers), renew the color of tiles or touch up enamel surfaces.



Technical Specifications:

| | |
|--------------------------------------|---|
| Quantity | 400 ml |
| Box / Case | 6 Pz. |
| Aspect | Tin-Plate can containing under pressure fluid |
| Chemical nature | Quick drying acrylic paints |
| Colour | White |
| Odour | Characteristic of solvent |
| Relative density | at 20°C 0,76 ÷ 0,80 g/ml |
| Flash point | Und. 0° C extremely flammable |
| Writing on spray bottom | Barcode, batch date, product name |
| Pressure | at 20°C 5,5 ± 1, bar |
| Pressure | at 50°C 8,0 ± 0,5 bar |
| Viscosity Ford cup | From 10" to 13" |
| Dry residual in spray | From 15% to 22% |
| Granulometry grindometer | Bottom Scale 0 a 2 Micron |
| Gloss | From 80 to 95 Gloss (Glossmeter angle 60°) |
| Thickness 1 coat | 13-18 Micron |
| Thickness 3 coats | 36-40 Micron |
| Resistance temperature | -10°C / +120°C (Peak 130° C) |
| Drying times T=20°C: | Out dust 10 minutes |
| | Dry to touch 15 minutes |
| | Dry in depth 22 hours |
| Security cap child-proof patented | |
| Token and ring colored for reference | |

Directive 2004/42/CE: C.O.V.
Under category: Special finishing
Limit value COV: 840 g/Liter

FIELDS OF APPLICATION:

Ceramic surfaces

FOR A PROFESSIONAL RESULT, CLEAN ACCURACY THE WORKPIECE BEFORE THE PAINTING. THE SPECIAL FINISH OF THESE SPECIAL EFFECTS OFFERS NO RESISTENCE TO ABRASION, THE PAINTED SURFACES SHOULD'T BE PLACED OUTSIDE, HANDLED OR OVER PAINTED.

HOW TO USE:


- Vigorously shake the can for at least 1 minute, until you hear the inner marbles move freely. It is also suggested to occasionally shake the cylinder even during use;
- Carefully clean the surface before application;
- Test in a hidden area to verify compatibility of the surface with the paint.



Remove the secure seal on the cap, to open the spray



**EROGATORE PRODOTTI
VERNICIANTI NERO/BIANCO**
BLACK/WHITE PAINTING
PRODUCTS ACTUATOR

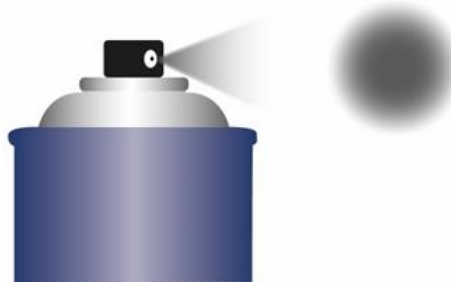

- **Erogazione:Lineare**
Dispensing:Linear
- **Quantità prodotto erogato:Media**
Quantity product dispensed:Medium
- **Tipo di erogazione:Cono medio**
Dispensing type:Medium cone
- **Tipo di spruzzo:Nebulizzato**
Spray type:Nebulized

SPRAY:

- Apply a first hand / coat light to improve coverage and adherence, to reduce the possibility of dropping. Apply from a distance of 20-30 cm;
- After a few moments apply a second horizontal hand/coat immediately followed by a third vertical hand / coat;
- Let dry a few minutes;
- After use, it's advisable to spray for 2/3 seconds with the spray upside down, to avoid the block of the actuator;
- After 24h, proceed with the normal use of painted piece.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 5°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT