




Paint Refill - Prefilled DME (V402)

This Ambro-Sol pre-refilled spray paint can comes with components and solvents compatible with every type of paint (added by the seller). You have the ability to fill your own cans at your own needs, great for domestic and for professional work.

REFILL PAINT - Bottle filled with 300ml mix of solvents, propellants and additives. It is compatible with most paints: acrylic, nitro-acrylic, nitro-synthetic, nitrocellulose. The reseller adds the paint according to the required color. In case of special filling the color can slightly change. We recommend using the product soon after filling the paint.

Technical specifications:

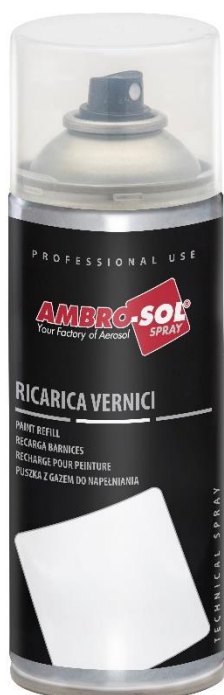

Quantity	300 ml in origin, 400 ml after the fill
Box / Case	12 Pz.
Aspect	Tin-Plate can containing under pressure fluid
Gas	DME (dimethyl ether)
Color	Colorless
Odour	Characteristic of solvent
Relative density	At 20°C 0,71 ÷ 0,75 g/ml
Flash point	Und. 0° C extremely flammable
Pressure	at 20°C 5,0 ± 0,5 bar
Pressure	at 50°C 8,0 ± 0,5 bar
Solvent	Acetone
Valve	female
Compatibility	Acrylic, Nitro, Synthetic Nitro, Nitro Acrylic, synthetic fast drying.
Compatibilità to verify	Alkyd, one-component epoxy
Possibility to have other types of nozzles for different effects and uses	

ARRANGEMENTS FOR USING: this tank Spray Preloaded: add, using a special equipment for filling, the paint in the desired color, in an amount of 100 ml. Warning: the paint must not be diluted as the solvents required for dilution are already contained in the cylinder Spray Preloaded. **HOW TO USE:** After filling with filler machine, vigorously shake the bottle for at least 1 minute, until you hear the marbles internal move freely. You may also want to shake the can occasionally during use. First apply a thin coat to improve the coverage and adherence and thus reduce the possibility of sagging. Distance application about 15 cm. After a few moments to apply a second horizontal hand immediately followed by a third vertical hand. Allow to dry a few minutes. After use, it is recommended spraying to 2/3 seconds with the cylinder upside down, to avoid filling the dispenser. After 24 h, proceed with the normal use of the painted piece.

MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 0°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT